

Product Specification

Product class: COB Reflector

Item No.: DK-42-24-REF-020


Material: PC

Certification: RoHS


Content

Specification-----	3
2D Drawing-----	4
Optical Datasheet-----	5
Packing Details-----	6
Application Notes-----	7

Specification

Item No	Picture	Size	Matched COB	Lighting Application
DK-42-24-REF-020		Diameter: Φ41.7mm Height:29mm FWHM:21.1°	CXA15**	Downlight, Spotlight

Drawing

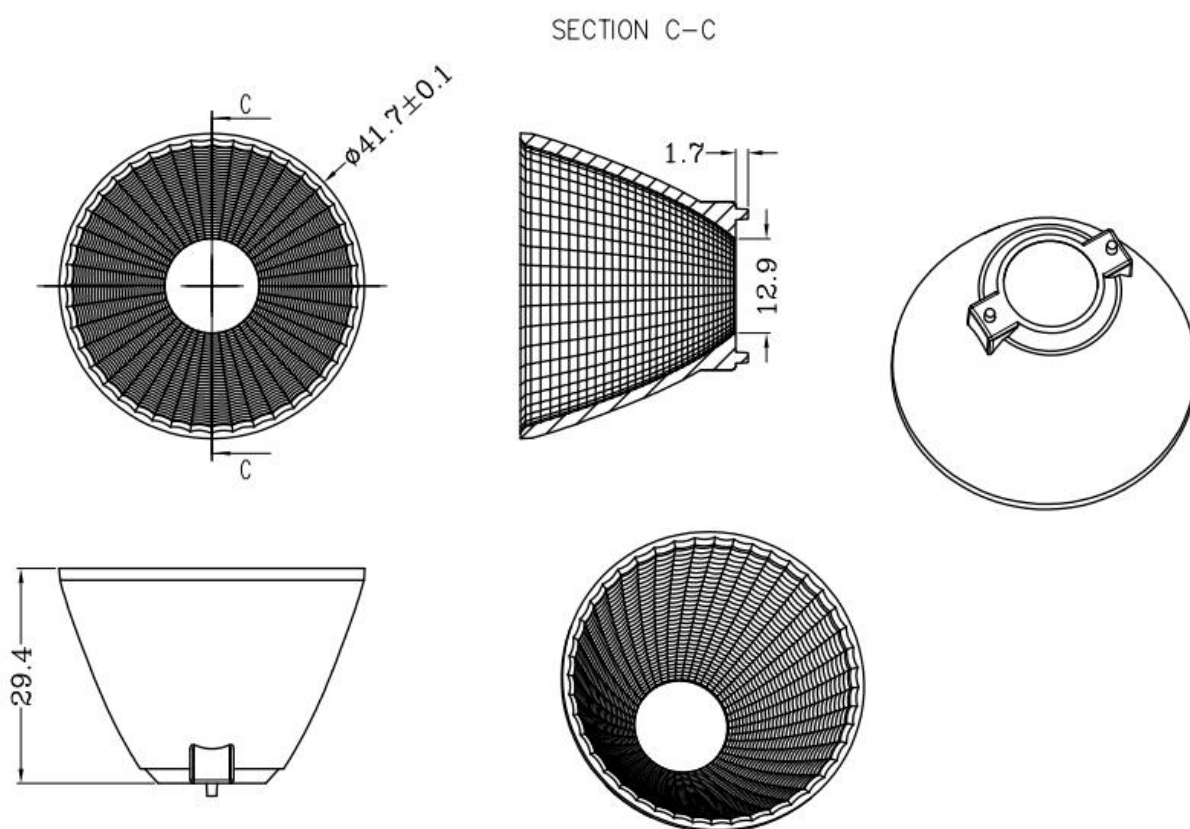

Optical test report

产品特点

灯具种类:
灯具制造厂商: 达尔科光学
电流: 0.000 A
功率因数: 0.000


电压: 0.0 V
功率: 0.00 W

光度结果


灯具CIE分类: 直接型
灯具光通量: 220.1 lm
下射光通量比: 100%
水平扩散角(10%, 25%, 50%, 75%): H55.7, H36, H21.8, H14.1
垂直扩散角(10%, 25%, 50%, 75%): V54.2, V34.2, V20.4, V12.6
灯具光效等级(LER): 220
峰值光强: 1000.42 cd

额定光通量: 220.1 lm
灯具效率: 100%
上射光通量比: 0%
中心光强: 737.66 cd
峰值光强位置: H0 V6


灯具实物照片

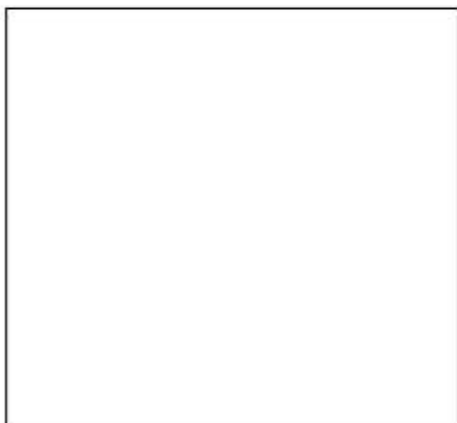

配光曲线

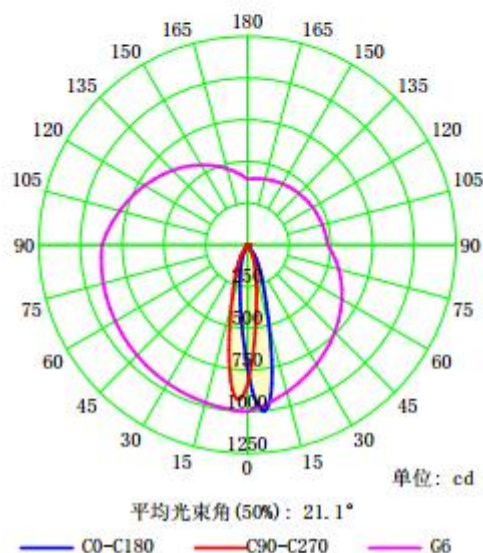

配光曲线

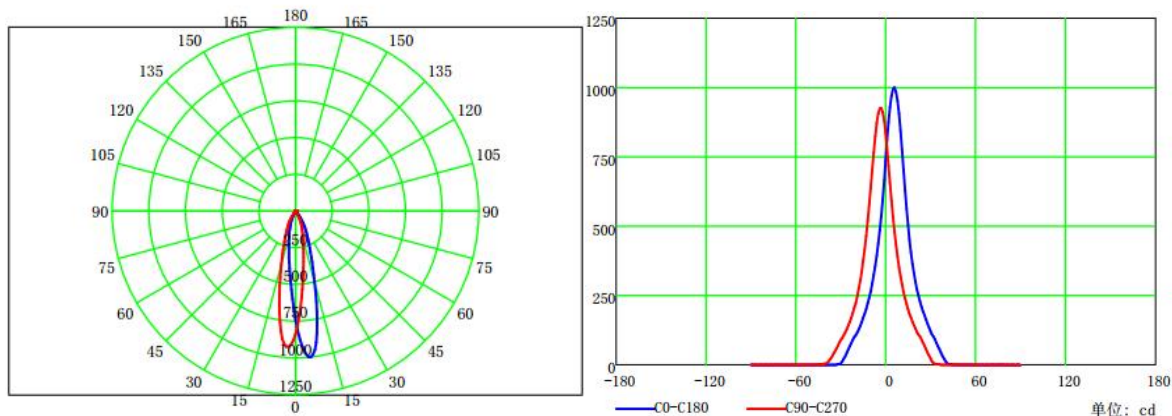

Packing Details

Material	Size	Quantity
Box	320*245*115MM	318PCS
Carton	510*330*255MM	1272PCS

Application Notes

(1) Please use a little water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.

(2) Forbid to use industrial solvent to clean the lens, such as alcohol.

(3) The working temperature is $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$ for lens, under 120°C for reflector.

(4) Storage environment temperature is $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$, humidity is 30%~95%。

Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.

(5) Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.

(6) Please wear gloves once install the lens, avoid to abrasion the lens surface.

(7) Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.